


DIMENSIONAMIENTOS MAS USUALES. PESOS (SIN GALVANIZAR)

	Kg/m2		Kg/m2
	-----		-----
30 X 30 / 30 ú 2 X di metro 4 - 18,4		30 X 30 / 30 ú 2 - 10 ú 2 - 18,84	
30 X 30 / 30 ú 2 X di metro 5 - 19,9		30 X 30 / 30 ú 2 - 30 ú 2 - 29,4	
30 X 30 / 30 ú 3 X di metro 4 - 26,2		60 X 60 / 30 ú 2 - 30 ú 2 - 15,1	
30 X 30 / 30 ú 3 X di metro 5 - 27,7		60 X 90 / 30 ú 2 - 30 ú 2 - 12,9	
		90 X 90 / 30 ú 2 - 30 ú 2 - 10,6	

CARGAS	portante	Pletina de paso de personal	Vano m x. LUZ (VANO) entre apoyos (mm.)										
			500	600	700	800	900	1000	1100	1200	1300	1400	
CARGA CONTINUA Kg/m2	30 X 2	1350		4300 (1,1)	2986 (1,7)	2205 (2,3)	1657 (3)	1310 (3,8)	1050 (4,6)	879 (5,6)	746 (6,6)	634 (7,9)	535 (9,1)
	30 X 3	1350		4300 (1,1)	4479 (1,6)	3302 (2,2)	2486 (3)	1971 (3,7)	1590 (4,6)	1319 (5,6)	1119 (6,7)	949 (7,7)	806 (9)
CARGA PUNTAL (7,3) Kg.	30 X 2	Base		4300	895 (1,1)	768 (1,3)	672 (1,8)	497 (2,4)	537 (3)	488 (3,4)	447 (4,5)	413 (5,4)	384 (6,3)
	30 X 2	apoyo	200 X 20 mm.	4300	1344 (1,1)	1152 (1,3)	1008 (1,8)	896 (2,4)	806 (3)	733 (3,4)	672 (4,5)	620 (5,4)	576 (6,3)

**EMPARRILLADOS - REJILLAS
PANELES - PELDAÑOS**

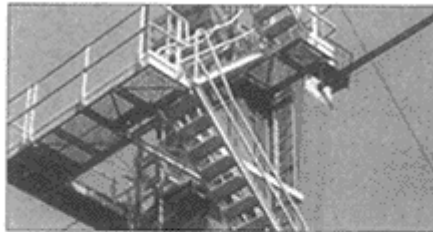

Tipos

ELECTROSOLDADAS



PRENSADAS

